


GOLD PX, sizes 04/05, 07/08


Duct connection options

A: Specify left-hand or right-hand version when placing orders.

B: Specify with or without end wall panel for each airflow direction when placing orders.



Left-hand version

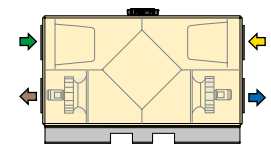

Right-hand version

GOLD PX size	Length mm	Width mm	Height mm	Weight kg	Duct connection mm	Airflow m ³ /s				Power connection
						Min	SFP _v ≤ 2.0 at 200 Pa	Max	Max Ecodesign	
04	2000	905	1191	291-337	Ø 315	0.08	0.45	0.45	0.45	1x230V, 10A or 3x400V, 10A
05	2000	905	1191	291-337	Ø 315	0.08	0.47	0.65	0.53	1x230V, 10 ¹ /16 ² A or 3x400V, 10A
07	2230	1075	1356	360-419	Ø 400	0.08	0.71	0.75	0.75	1x230V, 10 ¹ /16 ² A or 3x400V, 10A
08	2230	1075	1356	369-428	Ø 400	0.20	0.79	1.00	0.83	1x230V, 16A ¹ or 3x400V, 10A ^{1/2}


1) Capacity variant 1. 2) Capacity variant 2.

GOLD PX, sizes 11/12


Duct connection options

A: Specify left-hand or right-hand version when placing orders.

B: Specify with or without end wall panel for each airflow direction when placing orders.

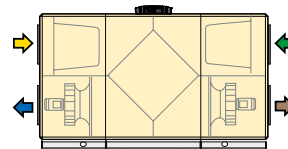

Left-hand version

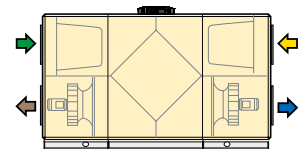

Right-hand version

GOLD PX size	Length mm	The longest section when sectionalizing mm	Width mm	Height mm	Weight kg	Duct connection mm	Airflow m ³ /s				Power connection
							Min	SFP _v ≤ 2.0 at 200 Pa	Max	Max Ecodesign	
11	2510	1200	1279	1486	552-646	Ø 500	0.20	1.01	1.10	1.05	1x230V, 16A ¹ or 3x400V, 10A ^{1/2}
12	2510	1200	1279	1486	574-668	Ø 500	0.20	1.14	1.40	1.20	3x400V, 10A

1) Capacity variant 1. 2) Capacity variant 2.


GOLD PX, sizes 14/20 and 25/30

Duct connection options


A: Specify left-hand or right-hand version when placing orders.

B: Specify with or without end wall panel for each airflow direction when placing orders.

C: Specify air intake from above for supply air and/or extract air when placing orders (not for outdoor units).

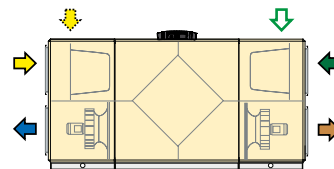

Left-hand version

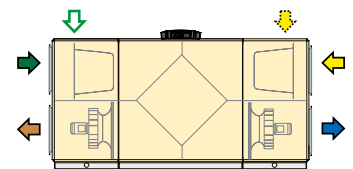

Right-hand version

GOLD PX size	Length mm	The longest section when sectionalizing mm	Width mm	Height mm	Weight kg	Duct connection mm	Airflow m ³ /s				Power connection
							Min	SFP _v ≤ 2.0 at 200 Pa	Max	Max Ecodesign	
14	2830	1300	1480	1586	667-773	1000x400	0.20	1.65	1.65	1.65	3x400V, 10A
20	2830	1300	1480	1586	703-809	1000x400	0.30	2.00	2.10	1.85	3x400V, 10 ¹ /16 ² A
25	3220	1550	1680	1786	905-1058	1200x500	0.30	2.45	2.50	2.40	3x400V, 10 ¹ /16 ² A
30	3220	1550	1680	1786	945-1098	1200x500	0.50	2.55	3.20	2.32	3x400V, 16 ¹ /20 ² A

1) Capacity variant 1. 2) Capacity variant 2.